



**TOP VIEW**

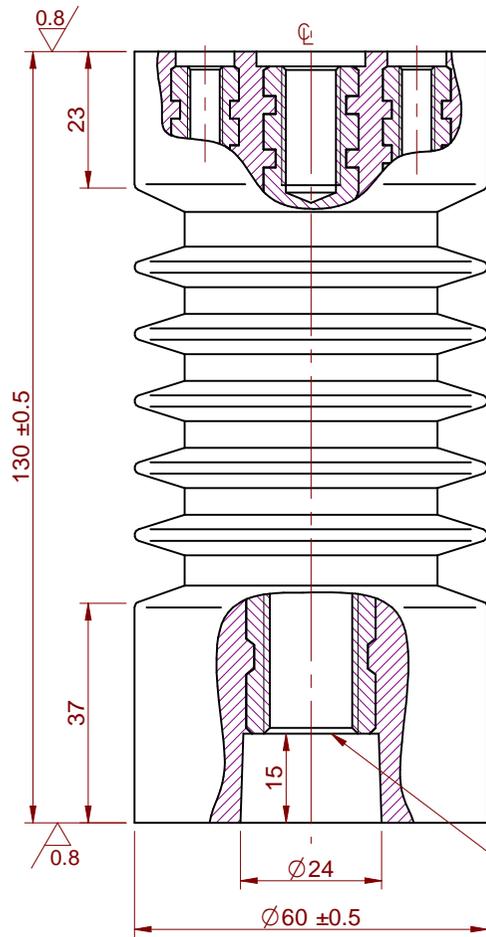

**FRONT VIEW**

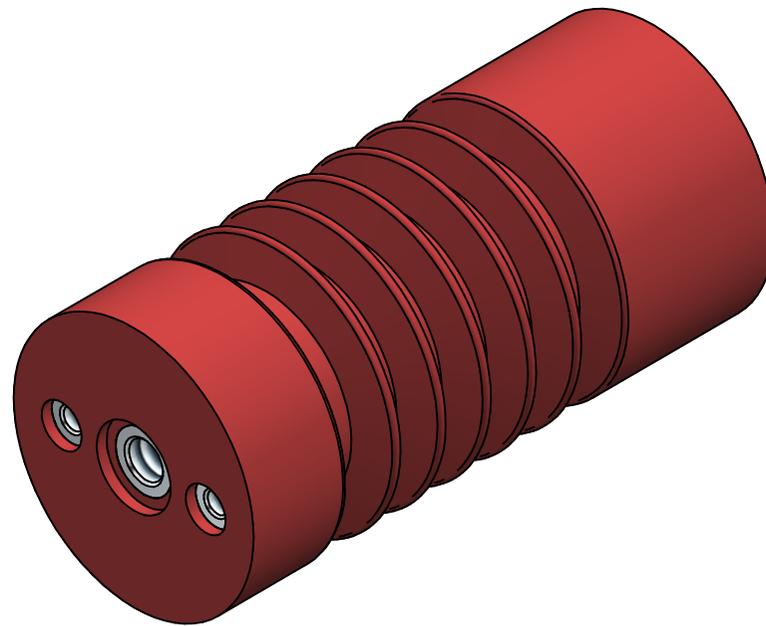

**ISOMETRIC VIEW**

<b>ELECTRICAL SPECIFICATION IS : 9431</b>			
1. RATED VOLTAGE	:	11	KV
2. ONE MINUTE DRY WITHSTAND VOLTAGE	:	40	KV
3. DRY LIGHTING IMPULSE WITHSTAND VOLTAGE	:	170	KVP
4. CREPAGE DISTANCE FROM CENTER	:	190	mm
5.	:		
6.	:		

<b>MECHANICAL SPECIFICATION IS : 9431</b>			
1. TENSILE FAILING LOAD	:	2277	KG.
2. CANTILEVER FAILING LOAD	:	550	KG.
3. COMPRESSION FAILING LOAD	:	625	KG.
4. NO OF PETTICOATS	:	5	NO
5.	:		

<b>OTHERS</b>			
1. COLOUR	:	BRICK RED / DARK BROWN	
2. MATERIAL	:	METAL PART - M.S. INSERTS / BRASS-INSERTS OTHER THAN METAL PART - EPOXY CAST RESIN	
3.	:		

<b>TITLE : INSULATOR (11KV) Ø60x130MM HEIGHT PG- 4975</b>	DRAWN BY :	JNS	14-11-2025
	CHKD. BY :	DC	14-11-2025
 <b>Press Gel Insulations Pvt. Ltd.</b> D-52 Sardar Estate, Ajwa Road, Vadodara, Gujarat - 390019 Website : www.thepressgel.com Email : info@thepressgel.com Phone : 9825507019	APPD. BY :	VPC	14-11-2025
	<b>DRG. No. : PG-4975-XX-Y</b>		
<b>SHEET : 1 OF 1</b>		<b>REV. : 0</b>	
ALL DIMENSIONS ARE IN MM. SIZE : A4(H)			